

Duo Pleated Blind

Product Information

Verosol's **Duo Pleated Blind** combines the soft appeal of a curtain with the versatility and simplicity of a blind. The ideal solution for heat and light control, the blind almost disappears when lowered or raised. You have the option to raise the blind in the conventional way or drop towards the window sill.

The Duo Pleated Blind is an ideal solution where privacy and/or ventilation is required. Simple and elegant, with a small stack height and short projection, giving you an uninterrupted view from your home or office window. Useful for sash windows or when privacy is required down low.

Duo Pleated Blinds with Guide Wires are a great idea when installing blinds on internal doors, as well as an ideal solution for boats and motor homes.

Further Information

To find out more information phone Verosol Customer Care on 1800 721 404 or visit www.verosol.com.au



Technical Information

| Product Code | P201.0 | | |
|-------------------------|--|---|--|
| Product Name | Duo Pleated Blind | | |
| Operation | Cord Operation | | |
| Dimensions | Width | 300mm minimum - 3400mm maximum | |
| | Drop | 200mm minimum - 3200mm maximum | |
| | Cord Lock | 2900mm maximum width | |
| | Maximum Area | 10m ² | |
| Head Rail | Material | Extruded Aluminium Alloy - Aysmmetric Profile | |
| | Dimensions | 33mm W x 20mm H | |
| Bottom Rail | Material | Extruded Aluminium Alloy - Aysmmetric Profile | |
| | Dimensions | 30mm W x 12mm H | |
| | Colours | Coordinated - Refer to "Pleated Rail Chart" | |
| | Paint | Electrostatic Powder Coated and Baked | |
| Inner Rail | Material | UV Stabilised Acrylonitrile Butadiene Styrebe [ABS] Plastic | |
| End Caps | Material | UV Stabilised Polymer Acrylic | |
| | Colour | Coordinated - Refer to "Pleated Rail Chart" | |
| Lift and Blind Cords | Material | Braided Polyester [minimum diametre: 2.2mm] | |
| | Colour | Coordinated - Refer to "Pleated Rail Chart" | |
| Control Lock | Material | ULTEM / PPS-Fortran | |
| | Туре | Front Mounted | |
| | Colour | Grey with colour coordinated cover | |
| Cord Position | Lift Cords 80mm from edge; Maximum spacing 500mm | | |
| Installation Brackets | Material | Electro Plated Steel | |
| | Operation | Top or Face Fixing - concealed when installed | |


Duo Pleated Blind

Optional

| Guide Wire System | Angle | Up to 15° angle from vertical |
|-------------------|---------------|---|
| | Maximum Width | 1500mm |
| | Maximum Area | 4.8m ² |
| | Cable | Stainless steel woven wire cable, 20mm from outer edges |

System Diagrams

Duo Pleated Blind

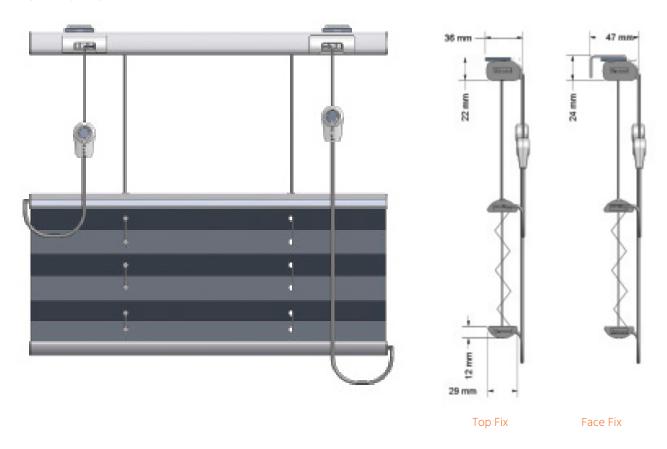

- * When the maximum fabric segment width of 2200mm is exceeded, blinds will have two segments with an overlap in centre of blind. If you have a specific requirement to match wide width fabric to window mullions, please specify and detail this on your order.
- ** The maximum width of VeroCell fabric is 3000mm, the maximum drop of VeroCell fabric is 2700mm. VeroCell fabric cannot be joined, and cannot have fabric cut-outs.