


## Twilight

Dimout Curtain Fabric

*Opulent Living*



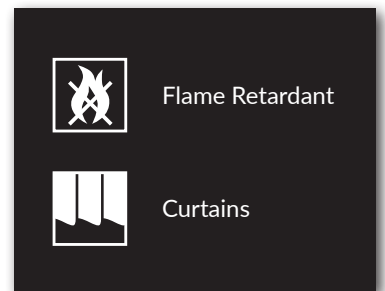




Designer: Patricia Urquiola

*Dimout curtain fabric with excellent drapeability & natural look*

### Features

- Part of the Verosol Opulent Living Collection - Drapery fabrics developed to the highest quality standards
- Twilight is a dense dimout fabric which offers excellent drapeability and light protection. Constructed with black yarns between the front and back sides. Twilight's back side is the same colour as its front but has a different yet complimentary feel. It is smooth and lustrous, adding to the elegance of the curtains.
- The colour palette for Twilight is understated & flexible. It comes in 10 colours ranging from subtle colours to neutrals
- Woven from 59% Polyester FR, 41% Polyester, Twilight ensures soft drapability and easy care
- Twilight is inherently flame retardant making it ideal for both residential and commercial applications
- Twilight was designed by influential designer Patricia Urquiola

### Cleaning and care

-  Wash at max. 60°C, mild process, drip dry
-  Do not bleach
-  Do not tumble dry
-  Iron at medium temperature (max. 150°C)
-  Professional dry cleaning with tetrachloroethylene, normal process

For more information visit [verosol.com.au](https://verosol.com.au) or call 1800 721 404




Green Building  
Council Australia  
Member 2020-2021

# Twilight

Dimout Curtain Fabric

Fabric Density	Dimout	Weighted Hem - NO		
Composition	59% Polyester FR   41% Polyester		Formaldehyde free	
Weight	1080g/lin mtr			
Width	3000mm	Continuous	Nominal roll size	35 linneal metres
Pattern	Solid			
Yarn type	Filament, Staple			
Binding	Plain / Satin			
Colour Fastness	Light [ISO 105-B02] 6			
Possible Shrinkage	1%			
Flame Retardancy [AS/NZS 1530.3-1999]	Ignitability Index	0	Range [0-20]	
	Spread of flame Index	0	Range [0-10]	
	Heat evolved Index	0	Range [0-10]	
	Smoke developed Index	1	Range [0-10]	
[International Standards]	BS 5867 Part 2 Type B	DIN 4102 B1   NF P 92 507 M1	IMO FTP Code 2010:Part 7	NFPA 701   UNI 9177 Class 1
Certification	Greenguard	EPD to EN15804	HPD 2.1	REACH
Aiflow Resistance [EN 29053]	Airflow Resistance of R <sub>c</sub> < 1374 Pa s/m			
Sound Absorption [EN ISO 354]	Report available upon request			
Designer	Patricia Urquiola			
Manufactured in	Turkey			
Cleaning	60/ X 80 40 P			
Suitable Products	Curtains			

## Colour Range

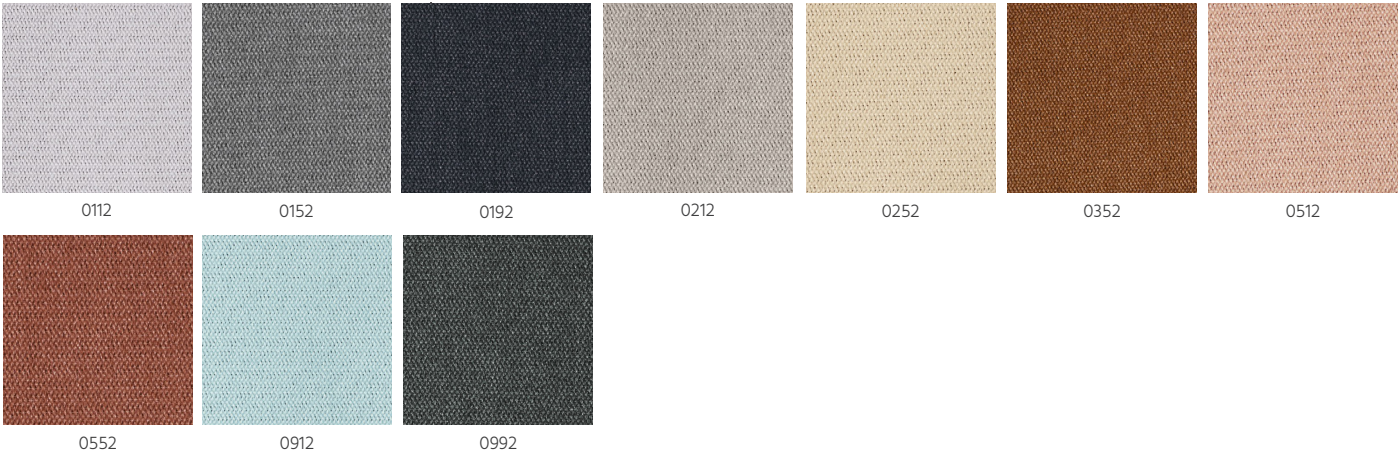

Care: 60/ X 80 40 P