

Conservatory / Skylight Pleated Blind

Product Information

Verosol's **Conservatory Pleated Blind – Wand Operated** is truly a unique blind. Designed for conservatories and/or skylight windows on inclined windows.

Not only is the Conservatory Pleated Blind kept in position by Guide Wires, but its specifically designed tension wires mean that the blind can be positioned at any degree of opening, without falling down. For ease in operation, Wand Operation is used for windows out of reach.

Choose from one of Verosol's metal backed fabrics and this pleated blind will help control heat and glare in summer and reduce heat loss in winter.

Further Information

To find out more information phone Verosol Customer Care on 1800 721 404 or visit www.verosol.com.au



Technical Information

Product Code	P2041	P205.0	P205.0	P205.0
Product Name	Conservatory Blind	Skylight - Cord	Skylight - Gravity Drop	Skylight - Wand
Operation	Profile Operation	Cord [two way pull]	Cord Lift Operation	Wand Operation
Dimensions	W: 300mm - 1500mm	W: 300mm - 3000mm	W: 300mm - 3000mm	W: 300mm - 1500mm
	H: 200mm - 3200mm	H: 200mm - 3000mm	H: 200mm - 3000mm	H: 200mm - 3000mm
	4.8m ² maximum area	8m ² maximum area	8m ² maximum area	3m ² maximum area

Head Rail	Material	Extruded Aluminium Alloy - Aysmmetric Profile
	Dimensions	33mm W x 20mm H
Bottom Rail	Material	Extruded Aluminium Alloy - Aysmmetric Profile
	Dimensions	30mm W x 12mm H
	Colours	Coordinated - Refer to "Pleated Rail Chart"
	Paint	Electrostatic Powder Coated and Baked
Wand	Length	Standard: 1800mm or specify length when ordering
Inner Rail	Material	UV Stabilised Acrylonitrile Butadiene Styrebe [ABS] Plastic
End Caps	Material	UV Stabilised Polymer Acrylic
	Colour	Coordinated - Refer to "Pleated Rail Chart"
Lift and Blind Cords	Material	Braided Polyester [minimum diameter: 1.0mm]
	Colour	Coordinated - Refer to "Pleated Rail Chart"
Blind Positioning	Material	Friction stop created by crossed tensioned cords through the intermediate rail
Cord Position	Lift Cords 20mm from edge; Maximum spacing 500mm	
Installation Brackets	Material	Electro Plated Steel
	Operation	Top or Face Fixing - concealed when installed

Turn over for motorisation and optional extras



Conservatory / Skylight Pleated Blind

Motorisation


Product Code	P205.6	
Product Name	Skylight Motorised Pleat	
Operation	240V AC Motorised	
Dimensions	Width	1000mm minimum - 5000mm maximum
	Drop	200mm minimum - 4500mm maximum
	Minimum Width	700mm [motor dependant]
	Maximum Area	15m ²
More Information	Refer to "8.0 Motorisation" in your Verosol Price List for more information	

System Diagrams


Skylight - Cord Operated

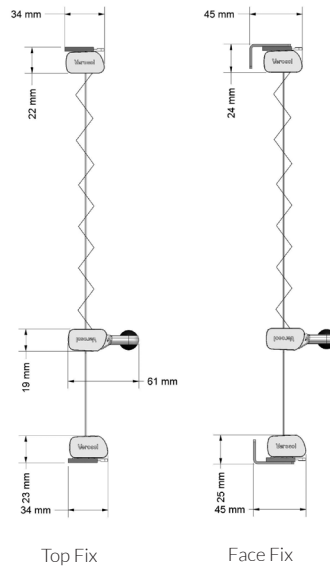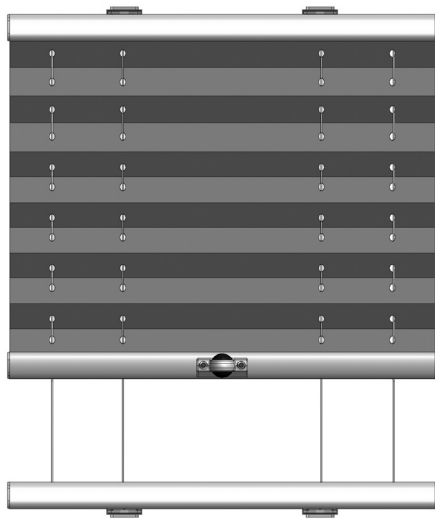



Skylight - Two Way Pull Cord Operated

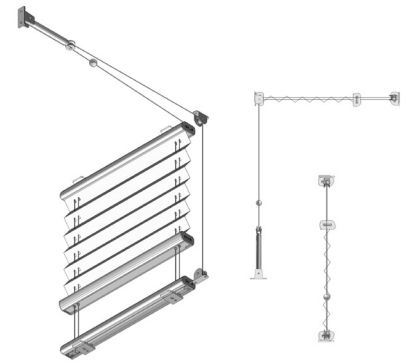


Skylight - Two Way Pull Wand Operated



Skylight - Motorised Pleat

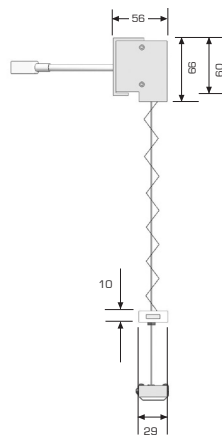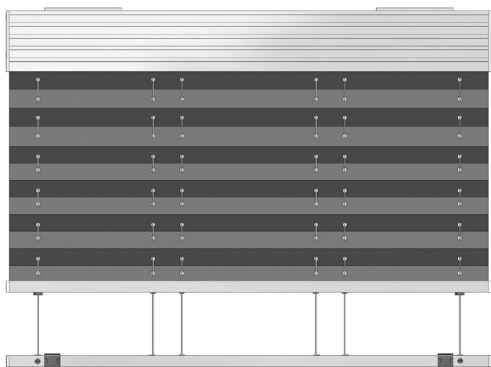

Skylight - Gravity Drop Cord Operated



* When the maximum fabric segment width of 2200mm is exceeded, blinds will have two segments with an overlap in centre of blind. If you have a specific requirement to match wide width fabric to window mullions, please specify and detail this on your order.

** The maximum width of VeroCell fabric is 3000mm, the maximum drop of VeroCell fabric is 2700mm. VeroCell fabric cannot be joined, and cannot have fabric cut-outs.